

AG-810


Polymer Thick Film

Description

AG-810 Silver Conductive Ink is a general purpose, silver-filled, electrically conductive ink for high-speed screen printing. Suitable for standard printed circuit applications, low temp heaters and crossover printing. It is compatible with PriElex UV curable dielectrics, conductive epoxy adhesives and UV curable component encapsulants.

Key Features

- Can withstand short-term temperature of solder bath process
- Tough, scuff resistant surface. Outstanding crease resistance
- Thin with solvent for spraying or dipping for EMI/RFID shielding applications
- Can be blended with carbon ink to obtain intermediate resistance values
- Compatible with PriElex UV curable dielectrics, conductive epoxy adhesives and UV curable component encapsulants

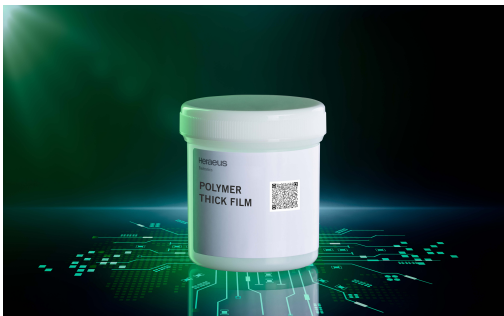

Typical Properties

Viscosity	5.2-5.7 kcps. Brookfield SC4-14 spindle @ SR 20, 25°C
Solids	52-56%
Metal	Ag
Color	Silver

	<25 µm
--	--------

Recommended Processing Guide

Printing Parameters	Monofilament polyester (157 to 230 mesh) or stainless steel (165-325 mesh) is recommended
Recommended Thinner	Solvent 30

### AG-810

#### Polymer Thick Film

---

#### Warranty

6 months

#### Storage

Store at ambient conditions away from direct light. Material should be thoroughly mixed or rolled on a jar roller at a slow speed for 1 hour prior to use

#### Americas

Phone +1 610 825 6050

[electronics.americas@heraeus.com](mailto:electronics.americas@heraeus.com)

#### Asia Pacific

Phone +65 6571 7649

[electronics.apac@heraeus.com](mailto:electronics.apac@heraeus.com)

#### China

Phone +86 53 5815 9601

[electronics.china@heraeus.com](mailto:electronics.china@heraeus.com)

#### Europe, Middle East and Africa

Phone +49 6181 35 4370

[electronics.emea@heraeus.com](mailto:electronics.emea@heraeus.com)