


liquid copper resinate

RL CU A6052A-6,4% H for mixing

Heraeus Precious Coatings is a global manufacturer of precious metal decoration products for ceramics and glass. Heraeus profits from over 100 years experience in ceramic and glass decoration designs, which has always made the department a pioneer in the development of precious metal colours. Modern precious metal preparations have to meet high demands on different types of substrates – such as on porcelain, tiles, drinking glasses, flacons and bottles. Decorations have to achieve good mechanical and chemical resistance such as dishwasher durability. The products supplied by Heraeus Precious Coatings include: Bright gold and platinum products, silk-matt gold and platinum products, burnish gold and platinum products, lusters and metallo-organic preparations for technical use.

1 General information

RL CU A6052A-6,4% H is a metallo organic material basing on copper in solution. The material is typically used as additive for example in the production of metallo organic metal pastes for technical usage.

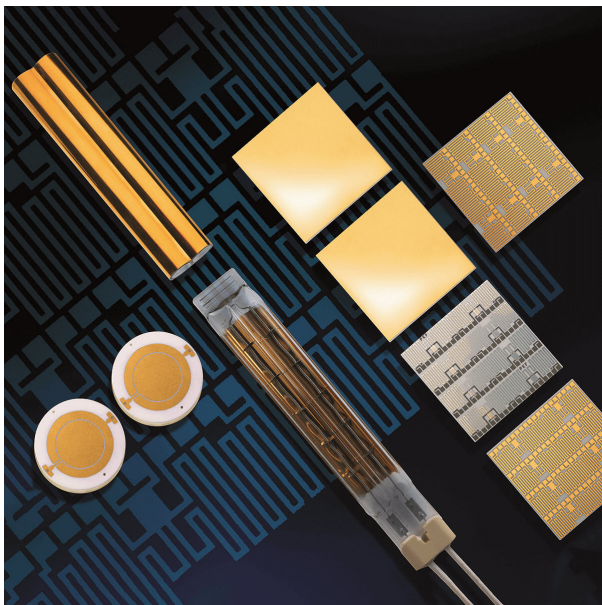

Directly to the product: [Click](#)



liquid copper resinate

RL CU A6052A-6,4% H for mixing

2 Properties of the product

The major characteristics of a Heraeus precious metal preparation are determined by its production recipe. From each lot produced, we take a sample and check defined characteristics.

Form:

Green liquid

Viscosity:

200 - 500 mPas (20°C, D=50s-1)

Copper content:

6,4% ± 0,2%

Chemical characterization:

Copper carboxylate in organic solvents

Calicinated residue:

8,0% ± 0,3% (theoretical value)

2.1 Processing

The solution is miscible with halogenated hydrocarbons, some higher alcohols (e.g. Terpineol), esters and ketones (e.g. Cyclohexanone). Not miscible with aliphatic and aromatic hydrocarbons, lower alcohols, esters and ketones. The material can be thinned with cyclohexanone or toluene.

2.2 Storage

Liquid golds are subject to an ageing process. Therefore, we recommend using the material within 6 months. The material should be stored at room temperature (20°C). Cool storage – but no freezing – has a positive impact on the shelf life.

3 Compliance to regulation

The properties of the product are determined following standardized laboratory test procedures. For optimal results the material should be fired in a profiled furnace supplied with dried, hydrocarbon and other contaminant free air.

3.1 REACH (SVHC)

The material is REACH (SVHC) compliant according to the latest ** Annex XIV to Regulation (EC) of the European Parliament and of the council on the Registration, Evaluation, Authorisation and Restriction of Chemicals ("REACH") by European Chemicals Agency and its subsequent amendments; the material does not contain any substance listed in Annex XIV.

3.2 RoHS

The material is RoHS compliant according to the latest ** Directives (European Union) of Restriction of Hazardous Substances ("RoHS") and its subsequent amendments (including the exceptions related to Pb)

Contact

Heraeus Tokmak A.S. | Kemalpaşa O.S.B. Mah. 37. Sok. No:6 | 35170 | Izmir | Turkey | +90 232 8772 410

The statements concerning our products correspond to our current knowledge and experience. It is the obligation of the purchaser to examine the usefulness of the products in its intended use in each individual case. In order to prevent production losses the user has to test the preparations in connection with every other material being involved in the production process and has to be satisfied that the intended result can be consistently produced.